


Multifunction regulator E19-28V – Replaces Valeo (No China)


Multifunction regulator E19-28V – Replaces Valeo (No China)

- FULLY MONOLITHIC DESIGN
- HIGH SIDE FIELD DRIVER
- THERMAL PROTECTION
- FIELD SHORT CIRCUIT PROTECTION
- PROTECTED DIAGNOSTIC LAMP DRIVER
- COMPLEX DIAGNOSTICS
- LOAD RESPONSE CONTROL

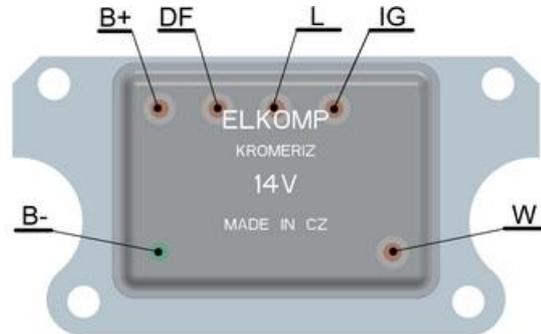

Description

The E19-28V is a monolithic multifunction alternator voltage regulator intended for use in automotive application. It includes the control section, the field power stage, fault diagnostic circuit which drives a warning lamp.

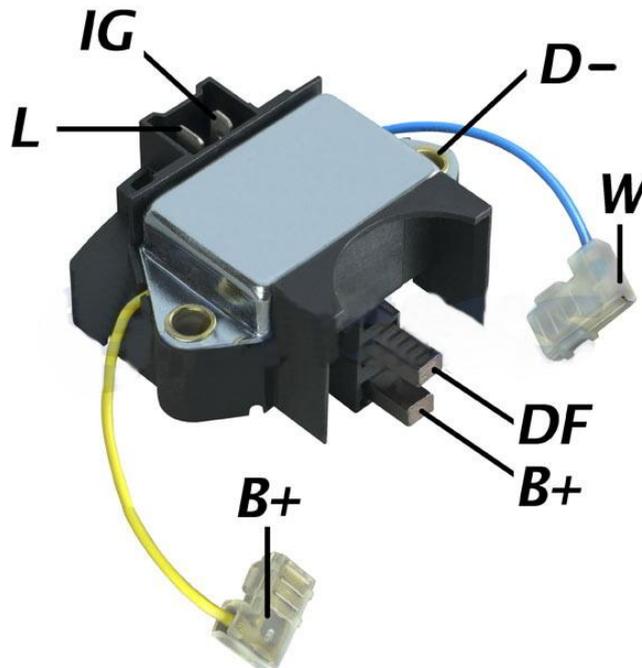

PIN FUNCTION

N°	Pin	Description
1	L	Lamp terminal low side driver; relay terminal high side driver
2	W	Phase sense input
3	B-	Ground
4	DF	Field high side driver output
5	B+	Alternator output sense and voltage supply

Multifunction regulator E19-28V – Replaces Valeo (No China)

THERMAL DATA

Symbol	Parameter	Value	Unit
T _{case}	Case Temperature	-40 to 125	°C
T _{stg}	Storage Temperature	-40 to 150	°C
T _{sh}	Thermal shutdown	150 ±15	°C

ELECTRICAL CHARACTERISTICS (T_{case} = -40°C to 125°C; unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V _{bat}	Operating Supply Voltage		20		33	V
I _{bsink}	Supply Battery Current				50	mA
I _{bstby}	Stand-by Current	V _{bat} = 24V, T = 25°C			10	mA
		V _{bat} = 24V, T = 40°C			15	
V _{reg}	Regulated Voltage & Therm. Drift (standard version)	I _{alt} = 0.5 · I _{nom} ; rpm = 0.5 · RPM _{MAX} ; T = 20°C	28.2 -8	28.5 -6	28.8 -4	V mV/°C
f _{sw}	Switching Frequency	in FSDF	30		400	Hz
V _{rpm}	Delta V _{rpm}	1800 < rpm < 12000; I _{alt} = 0.3 · I _{nom}			400	mV
V _{load}	Delta V _{load}	0.1 · I _{nom} < I _{alt} < 0.9 · I _{nom} ; rpm = 0.5 · rpm _{max}			400	mV
V _{reg}	Reg. Voltage without Battery	I _{alt} = 3A resistive			32	V
T _{j-sd}	Thermal Shut-down	DF = OFF STATE L = OFF STATE	170		200	°C
T _{j-sd-hys}	Thermal Shut-down Hysteresis	DF, L = from off state (due to thermal shutdown) to on	2		10	°C
V _F	Freewheeling Diode DF	I _F = 1A			2	V
I _{fsc}	Short Circuit Threshold DF	DF = 28V; T = -40 to 25°C	8.5		18	A
I _{fsc}	Short Circuit Threshold DF	DF = 28V; T = 25 to 125°C	7		18	A
FS _{DF}	Pre-excitation F.S.D.F	f = 348Hz ±15%	10.6	12.5	14.3	%

Multifunction regulator E19-28V – Replaces Valeo (No China)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
t _{ST}	Soft Start Delay Time	activated at first running-on only		0		s
t _{SL}	Soft Attack Time	from 0 to 100% field duty cycle	2.5	2.88	3.39	s
BI	Soft Attack Blind Zone	% of maximum D.C. immediate variation of soft attack	0		10	%
t _{rise}	Output Voltage Rise Time	I _{field} = 3A resistive	5		50	μs
t _{fall}	Output Voltage Fall Time		5		50	μs
I _{flk}	Output Field Driver Leakage Current	DF = 24V			1	mA
V _{LS}	Low Side Driver Saturation Voltage	I _{sink} = 0.25A			1.5	V
V _{thD+}	Enable Regulator Voltage L		0.8	1	1.15	V
I _{thD+}	Enable Regulator Pull-down Current		0.4		3.5	mA
DISAB	Soft Attack Inhibition Frequency		265	313	360	Hz
EN ₁	Soft start delay time enable frequency		88	104	120	Hz
EN _{1_hy}	Soft start delay time enable frequency hysteresis		EN ₁ -8	EN ₁ -10	EN ₁ -12	Hz
V _{PHL1}	Enable Control Voltage W high threshold	Square wave 1KHz	0.67	0.795	0.92	V
V _{PHL2}	Enable Control Voltage W low threshold		V _{PHL1} -0.48	V _{PHL1} -0.57	V _{PHL1} -0.66	V
t _{PH}	W Filtering Time		15		120	μs
V _{PHH1}	Diag. Phase Loss High Voltage		18	20.5	23	V
V _{PHH2}	Diag. Phase Loss Low Voltage		8	10	12	V
t _{PHD}	Diagnostic W Filtering Time		50		200	μs
I _{PH}	Phase Pull-down Current		1		8	mA
t _D	Diagnostic Alarm Delay		0.48	0.575	0.65	s


THERMAL COMPENSATION (V_{reg}, standard version)

Temperature [°C]	V _{reg}		
	Min. [V]	Typ. [V]	Max. [V]
-40	28.5	28.8	29.1
25	28.2	28.5	28.8
125	27.9	28.2	28.5

Multifunction regulator E19-28V – Replaces Valeo (No China)

Figure 1. Thermal Compensation (Vreg, standard version)


W-O.K.
L-O.K.
S-NO
DFM-NO
L/R-NO

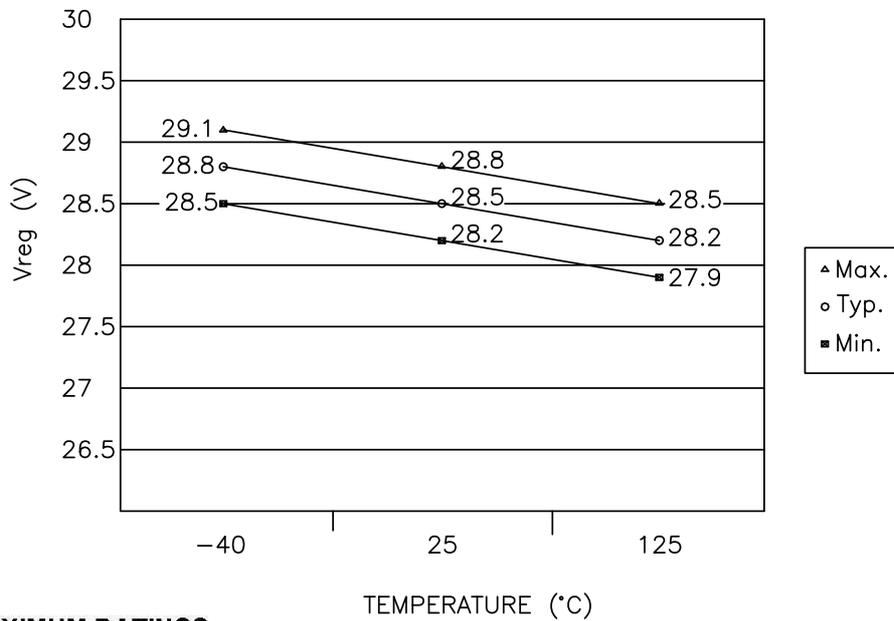

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	DC Supply Voltage (2 min. @ 25°)	54	V
	Transient Supply Voltage (load dump); $t < 0.5s$ @ 25°C	54	V
	Transient Supply Voltage (low energy spikes pulse ISO7637/2)	70	V
I_O	Output Current Capability	internally limited	A
P_{tot}	Power Dissipation(@ $T_{case} = 150^\circ C$, $I_{field} = 5A$)	tbd	
	Reverse Voltage all pins @ 25°C, $T = 15s$	-2.5	V
	DC Pin Current (bonding limitation) on DF, B+, B- pins	11	A
	EDS Voltage (Human body model)	± 4	KV

Figure 2. Load Transient Example.

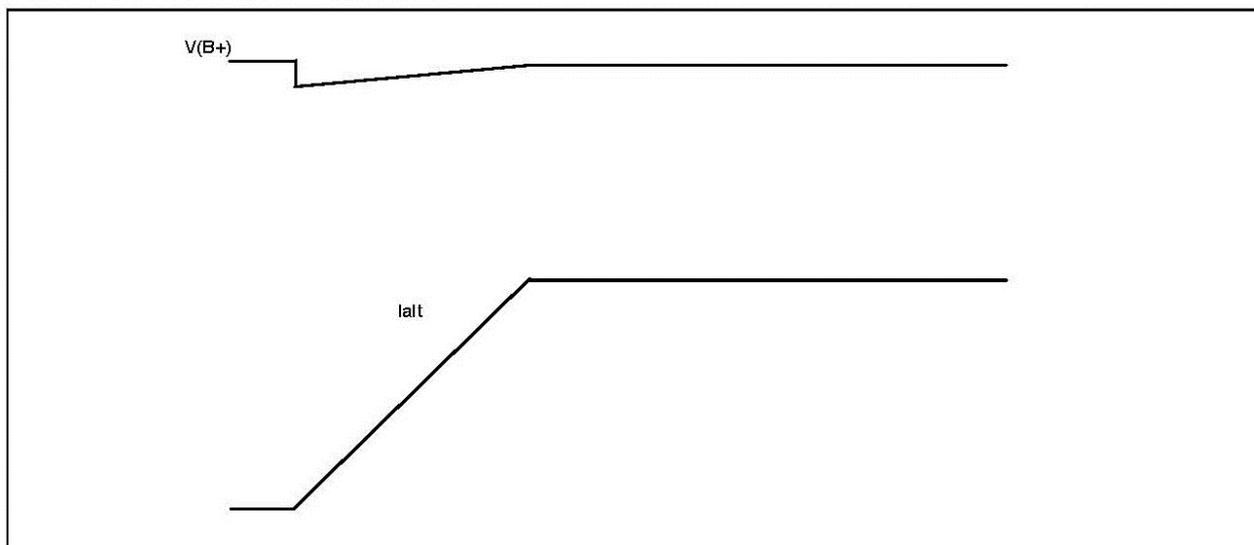

Multifunction regulator E19-28V – Replaces Valeo (No China)

Figure 3. Start-Up Timing

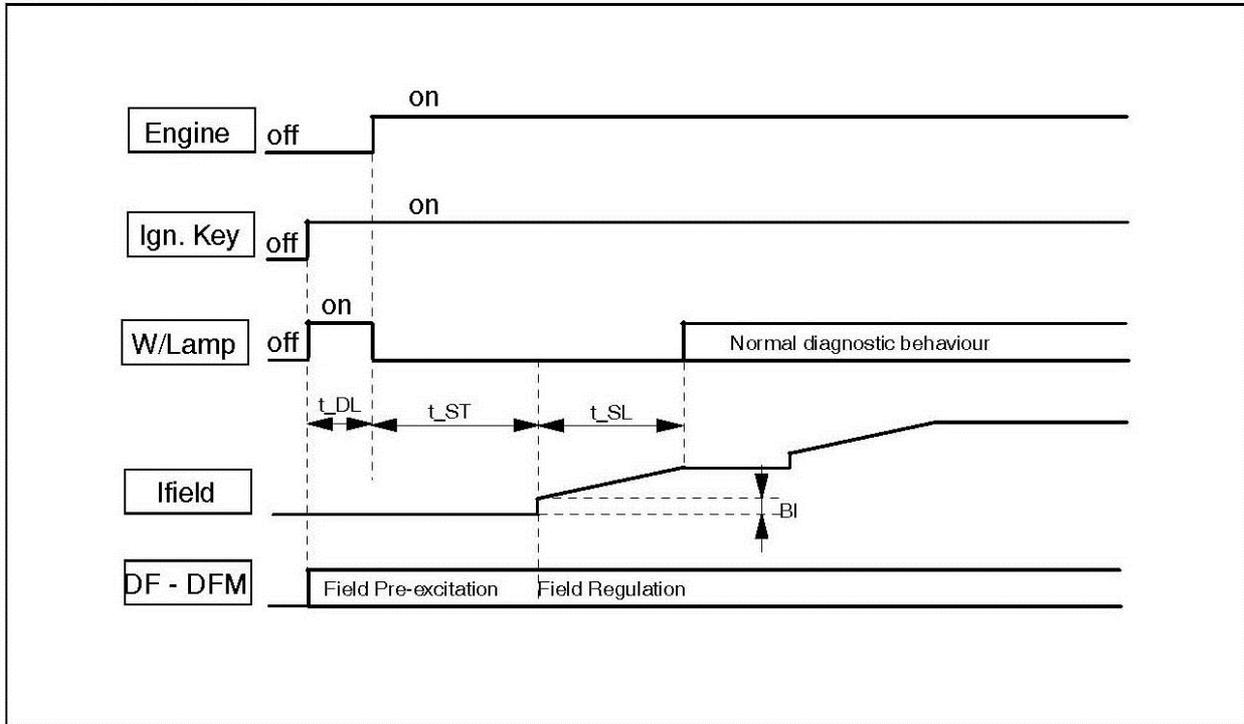


Table 1. Fault Detection

Root Cause	Signal	Effect	Test detect
Alternator belt breaking	W	Alternator disexcitation	$V_{PH} < V_{PHH}$ & $V_{A+} < V_{reg}$
Brushes open	W	Alternator disexcitation	$V_{PH} < V_{PHH}$ & $V_{A+} < V_{reg}$
Field interruption	W	Alternator disexcitation	$V_{PH} < V_{PHH}$ & $V_{A+} < V_{reg}$
Field short circuit to the battery	W	Alternator disexcitation	$V_{PH} < V_{PHH}$ & $V_{A+} < V_{reg}$
Field short circuit to the ground	DF	Overvoltage	$DF < VS1$ & $V_{A+} > V_{reg}$

Figure 4. Load Response Control.

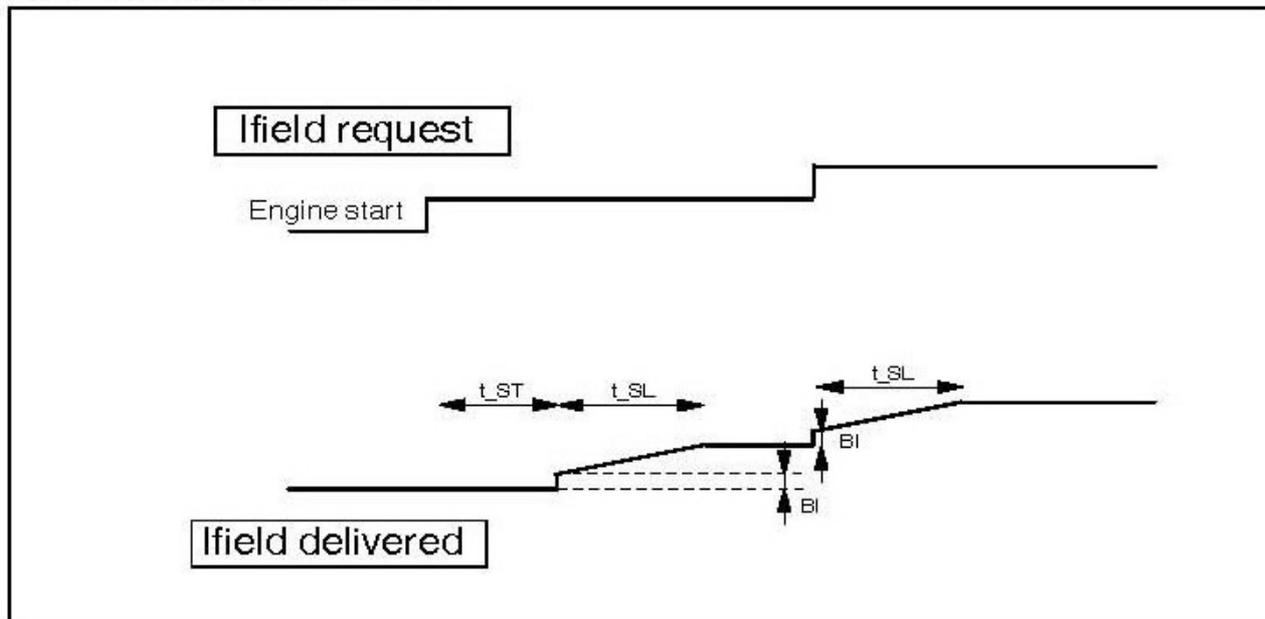


Figure 5. Driver field

